arXiv:1206.2131v1 [cs.FL] 11 Jun 2012

On hybrid models of quantum finite automata

Lvzhou Li[a,b,*], Yuan Feng[b]

[a]*Department of Computer Science, Sun Yat-sen University, Guangzhou 510006, China*
[b]*Center for Quantum Computation and Intelligent Systems, FEIT, University of Technology Sydney, Sydney 2oo7, Australia*

Abstract

In the literature, there are several hybrid models of quantum finite automata (QFA) which are distinguished from other QFA models by consisting of two interactive components: a quantum component and a classical one, accompanied with possible communication between them. These hybrid models are of particular interest, which is reflected at least by the following two points. (i) They are more realistic than fully quantum models, since using the current technology, large-scale quantum processors are still a long term goal, whereas building a hybrid model augmented with a small number of qubits is relatively easy. (ii) Hybrid models usually save efficiently states by being augmented with a small number of quantum states, and it is thus meaningful to construct a hybrid model for a practical problem (language) with a desired trade-off between quantum and classical states. Consequently, it is relevant to characterize the structure of these models in an intuitive way and to clearly clarify the relationship between these models and others. All these are helpful for well understanding hybrid models and for achieving an instruction to construct these models. Hereby, we would like to do that in this paper. First, we characterize the structure of these hybrid models in a uniform framework: a hybrid model can be regarded as a communication system consisting of two components, and the communication between them can be modeled by controlled operations. By doing so, we provide an intuitive insight into the structure of hybrid models. Second, we clarify the relationship between these hybrid models and some other quantum models. Specifically, we show that the existing hybrid models of QFA can be simulated exactly by QFA with quantum operations, which in turn has close relationship with two early proposed models: *anciall QFA* and *quantum sequential machines*.

Keywords: Quantum finite automata, Hybrid model, Controlled operation

---

[*] Corresponding author.
E-mail address: lilvzhou@gmail.com (L. Li); Yuan.Feng@uts.edu.au (Y. Feng)

1. Introduction

Quantum finite automata (QFA), as a theoretical model for quantum computers with finite memory, have interested many researchers (e.., see [1-7, 9-11, 13-18, 20-24,26]). So far, a variety of QFA have been proposed and they differ from each other mainly by three factors: 1) the moving direction of the tape head, 2) the property owed by the state evolution, and 3) the observation policy. The three factors and their impact on QFA's computational power are elaborated in the following.

Firstly, according to the moving direction of the tape head, we have two classes of QFA: *one-way* QFA (1QFA) where the tape heads are required to move right on scanning each tape cell and *two-way* QFA (2QFA) where the tape heads are allowed to move left or right, and even to stay stationary.[1] While 1QFA were shown to recognize[2] languages no more than regular languages [13] , 2QFA were shown to be able to recognize non-regular languages [4, 11]. For example, KW-2QFA (named after Kondacs and Watrous, the authors who defined this model) were proved to recognize not only all regular languages, but also some non-regular languages in linear time [11]. Even if not equipped with fully quantum power, a variant of KW-2QFA, named *two-way quantum finite automata with quantum and classical states* (2QCFA, for short), is still powerful enough to recognize some non-regular languages [4]. The two 2QFA models mentioned above are more powerful than their classical counterparts—two-way probabilistic finite automata (2PFA).

The second factor affecting QFA's definition is the property owed by the state evolution. In early references, QFA's evolution is generally assumed to be described by unitary operators, in accord with the postulate of quantum mechanics that the evolution of a closed quantum system is described by a unitary transformation. Later, it was realized that a QFA need not be a closed system, can interact with the environment, and thus the evolution of a QFA should be described by general quantum operations (i.e., trace-preserving completely positive mapping), instead of being limited to unitary operators (see Hirvensalo [9, 10]). Afterwards, QFA with quantum operations were further explored by Li et al [13] and Yakaryilmaz et al [26]. QFA with quantum operations have been thought to be a right definition for QFA, since they possess nice closure properties and have a competitive computational power with their classical counterparts. For instance, 1QFA with quantum operations are as powerful as deterministic finite automata (DFA), but 1QFA with unitary operators are less powerful than DFA [13].

---

[1] There is a model called 1.5QFA where the tape heads are allowed to move right or stay stationary on scanning a tape cell [2].

[2] In this paper, recognizing a language always means recognizing a language with bounded error.

A thing seeming ignored by us but worth mentioning is that before the work of [9, 10], a QFA model named *ancilla QFA* had been proposed in [21]. Ancilla QFA actually represent the same model as 1QFA with quantum operations, but in different forms. This will become clearer in later sections after a little analysis. Interestingly, the authors of [20] presented an application of QFA to quantum interact proof systems (QIP systems) where there was a result asserting that each regular language can be recognized by a QIP system that takes a 1QFA as a verifier ([20], Proposition 4.2). In fact, when referring to the proof of that result, on can find that the QIP system constructed to recognize a regular language is essentially an ancilla QFA. More interestingly, an ancilla QFA can be regarded as a *quantum sequential machine* [22, 14], assigned with some accepting states. The relationship among these models will be elaborated in later sections. From the above it follows that the model of QFA with quantum operations had indeed been implied in early references, but only very recently started to attract the deserved attention from the academic community.

The observation policy is the third factor to be considered when defining a QFA model. If one wants to determine whether a QFA is in an accepting state, an observation should be performed. Thus, we have two policies: i) *measured-once* where a measurement deciding to accept or reject is performed after the whole input string has been scanned, and (ii) *measured-many* where a measurement deciding to halt (accept or reject) or continue is performed after scanning each input symbol. One of motivations for considering the observation policy as a factor mainly stems from the result that *measured-many 1QFA*(MM-1QFA) proposed by Kondacs and Watrous[11] are more powerful that measured-once 1QFA (MO-1QFA) proposed by Moore and Crutchfield [17]. Thereby, a large body of work has been devoted to characterize the model of MM-1QFA, and furthermore when defining a new QFA model, one often follows this line: define a measured-once version accompanied with a measured-many version. However, many times of measurements do not always lead to enhancement on the computational power. For instance, for the model of 1QFA with quantum operations, the measured-many version has the same computational power as the measured-once version [13].

As we know, the speedup of Shor's algorithm for factoring large integers stems from quantum superposition. So, what should be responsible for the power of QFA? As shown above, we assert that: (i) on one hand, quantum superposition has not offered any additional computational power to 1QFA, since 1QFA with unitary operators are less powerful than DFA, and even if equipped with quantum operations, 1QFA has only the same computational power with DFA; (ii) on the other hand, quantum superposition in conjunction with the freedom of the tape head moving in two ways has indeed enhanced the computational power of 2QFA, since 2QFA are shown to be more powerful than 1QFA and even than 2PFA.

By the above discussions, if one wants a powerful QFA, it should be a 2QFA. However, fully quantum models such as KW-2QFA are not so desirable, since to implement such a machine, we need at least $O(logn)$ qubits to store the position of the head (where n is the length of the input). In contrast, the hybrid model—2QCFA seems to be of more interest, since this model is more realistic than 2QFA, but without loss of computational power.[1] On the other hand, although 1QFA possess no advantage over their classical counterparts in the computational power, they still exhibit advantages in other aspects, e.g., in state complexity. For example, Ambainis and Freivalds [1] showed that there exists a language such that a 1QFA recognizing it is exponentially smaller than any equivalent classical automata. In addition, theoretical problems regarding 1QFA are relatively easy to investigate, whereas 2QFA are difficult to characterize. Therefore, 1QFA are still an appropriate starting point to the study of quantum computing models.

In the above, there are a class of QFA that have not been sufficiently mentioned, that is, hybrid models which are distinguished from other QFA models by consisting of a quantum component and a classical component, accompanied with possible communication between them. For example, the model of 2QCFA studied by Ambainis and Watrous [4] is such a hybrid model. In this model, the tape head's movement is regulated by a classical transition function, which leads to that 2QFCA are more realistic, but without loss of computational power. Also note that the quantum Turing machine model studied by Watrous [25] is also a hybrid model which can be seen as the classical Turing machine model augmented with a quantum component.

Another hybrid model is the one called *one-way quantum finite automata*

---

[1] Although no formal proof shows that 2QCFA are as powerful as 2QFA, the already known results show that 2QCFA are powerful enough to outdo 2PFA.

with control language (CL-1QFA, for short) proposed by Bertoni [6]. In a CL-1QFA, on scanning an input symbol, a unitary operator is first applied to the current quantum state and in succession a projective measurement is performed. Thus, a CL-1QFA fed with an input string x will finally produce a sequence y of measurement results with a certain probability. The input string x is said to be accepted if y is a given regular language (i.e., the control language). At first glance, the behavior of CL-1QFA looks very strange. However, after a simple analysis in later sections, it can be seen that a CL-1QFA is a natural hybrid model. In [6], it was shown that the languages recognized by CL-1QFA are in the class of regular languages. Furthermore, [18] showed that CL-1QFA recognize exactly the class of regular languages, and for some regular languages CL-1QFA can be more succinct (i.e., have less states) than DFA.

Very recently, Qiu et al [24] proposed a new hybrid model called *1QFA together with classical states* (1QFAC, for short) that exhibits some interesting properties. A lQFAC consists of a quantum component and a classical component. On scanning each input symbol, the evolution of the quantum component is represented by a unitary operator determined by the current classical state and the currently scanned symbol. The classical component is represented by a DFA. After the whole input string has been scanned, a (projective) measurement determined by the final classical state is performed on the final quantum state, giving the accepting and rejecting probabilities. In [24], it was shown that 1QFAC recognize exactly the class of regular languages and can save exponential states compared with DFA for a family of languages .

Indeed, these hybrid models stated above are of particular interest and worthy of further consideration, which is reflected at least by the following two points.

(i) Hybrid models seem to be more realistic than fully quantum models in that (a) using the current technology, large-scale quantum processors are still a long term goal, whereas building a hybrid model augmented with small numbers of qubits is relatively easy, and (b) in hybrid models, the tape head's movement can be regulated by the classical function.

(ii) As shown above, hybrid models often save states by being augmented with a small number of quantum states. Therefore, it is significant to construct a hybrid model for a practical problem (language) with a desired trade-off between quantum and classical states.

Consequently, it is relevant to characterize the structure of these models in an intuitive way and to clearly clarify the relationship between these models and others. All these are helpful for well understanding hybrid models and for achieving an instruction to construct these models. Taking these into account, in this paper we will reinvestigate the hybrid QFA models mentioned before. We will characterize the three existing hybrid models in a uniform framework: each hybrid model can be regarded as a communication system consisting of a quantum component and a classical component, and the communication between the two components can be modeled by controlled operations. The three models differ from each other mainly by the allowable communication: (1) in a CL-1QFA, communication is allowable from the quantum component to the classical one, (2) in a 1QFAC, communication is allowable in the opposite direction, and (3) in a 2QCFA, two-way communication is allowable. Despite these difference, we will show that CL-1QFA, 1QFAC and the one-way version of 2QCFA can all be simulated exactly by 1QFA with quantum operations. These characterizations for one-way hybrid models can also be extended to their two-way versions. 1QFA with quantum operations actually represent the same model as another early proposed model—Ancilla QFA, which in turn can be regarded as quantum sequence machines assigned with some accepting states. In summary, our contributions in this paper are to provide an intuitive insight into the structure of three existing hybrid models and to clearly clarify the relationship between these hybrid models and some other quantum models. Some results in the literature concerning the language recognition power and the equivalence problem of these hybrid models follow directly from this paper. Our work provides a new angle of view to hybrid models of QFA, and we believe that this is helpful for well understanding these quantum models and may illuminate further study.

The reminder of this paper is organized as follows. Some preliminaries are presented in Section 2. In section 3, we introduce controlled quantum operations that will be used in later sections. Section 4 is the main part of this paper where the structure of three hybrid models of QFA is characterized and the relationship between these hybrid models and other models is clarified. Some other interesting points are also clarified there. Some conclusions are made in Section 5.

2. Preliminaries

Some notations and notions to be used in this paper are explained here. Others will be explained as they appear in the first time.

2.1. Preliminaries from linear algebra and quantum theory

Generally, we use $\mathcal{H}$ to denote a finite-dimensional Hilbert space. Let $L(\mathcal{H})$ denote the set of all linear operators from $\mathcal{H}$ to itself. In this paper, when referring to an operator, we always means a linear operator. A^*, $A^\dagger$ and $A^\top$ denote respectively the conjugate, the conjugate-transpose, and the transpose of operator A. $\mathrm{Tr}(A)$ denotes the trace of operator A. An operator $U \in L(\mathcal{H})$ is said to be unitary if $U^\dagger U = UU^\dagger = I$. Given two Hilbert space $\mathcal{H}_1$ and $\mathcal{H}_2$, a mapping Φ in this form: $L(\mathcal{H}_1) \to L(\mathcal{H}_2)$ is called a super-operator.

The detailed background on quantum information can be referred to [19], and here we just introduce briefly some necessary notions. According to the postulates of quantum mechanics, the state of a closed quantum system is represented by a unit vector $|\psi\rangle$ in a Hilbert space $\mathcal{H}$, and the evolution of a closed quantum system is described by a unitary operator on $\mathcal{H}$. A more general tool to describe the state of a quantum system is the density operator. A density operator ρ on Hilbert spaces $\mathcal{H}$ is a linear operator satisfying the following conditions:

(1) (Trace condition) ρ has trace equal to 1, that is, $\mathrm{Tr}(\rho) = 1$.

(2) (Positivity condition) $\rho \geq 0$, that is, for any $|\psi\rangle \in \mathcal{H}$, $\langle\psi|\rho|\psi\rangle \geq 0$.

By $D(\mathcal{H})$ we mean the set of all density operators on Hilbert space $\mathcal{H}$.

In practice, an absolutely closed system almost does not exist, because a system interacts more or less with its outer environment, and thus it is open. Then the evolution of an open quantum system is characterized by *quantum operations* [19]. A quantum operation, denoted by $\mathcal{E}$, is a super-operator form $L(\mathcal{H}_{in})$ to $L(\mathcal{H}_{out})$ that has an *operator-sum representation* as

$$\mathcal{E}(\rho) = \sum_k E_k \rho E_k^\dagger, \tag{1}$$

where the set of $\{E_k\}$ known as *operation elements* are linear operators from the input space $\mathcal{H}_{in}$ to the output space $\mathcal{H}_{out}$. Furthermore, $\mathcal{E}$ is said to be trace-preserving if it satisfies the following completeness condition:

$$\sum_k E_k^\dagger E_k = I, \tag{2}$$

where I is the identity operator on $\mathcal{H}_{in}$. Any physical admissible operation is a trace-preserving quantum operation (also called a completely positive trace-preserving mapping).

In this paper, when referring to a quantum operation $\mathcal{E}$, we always means a trace-preserving quantum operation, and also it is assumed to have the same input space and output space.

To extract information from a quantum state $|\psi\rangle$, a measurement has to be performed. We consider here only the projective measurement that is defined by a set $\{P_i\}_{i=1}^n$ of so-called projective operators/matrices, where indices i refer to the potential classical outcomes of measurements, with the property:

$$P_iP_j = \begin{cases} P_i & i = j, \\ 0 & i \neq j, \end{cases}$$

and with the completeness condition: $\sum_{i=1}^n P_i = I$. In case a state $|\psi\rangle$ is measured with respect to the set of projective operators $\{P_m\}$, then the classical outcome m is obtained with the probability

$$p(m) = \|P_m|\psi\rangle\|^2,$$

and the state $|\psi\rangle$ "collapse" into the state

$$\frac{P_m|\psi\rangle}{\sqrt{p(m)}}.$$

2.2. Preliminaries from automata theory

$|S|$ denotes the cardinality of set S. For non-empty set Σ, by Σ^* we mean the set of all strings over Σ with finite length. $|w|$ denotes the length of string w.

A DFA is a five-tuple $\mathcal{A} = (S, \Sigma, s_1, \delta, S_a)$ where $S = \{s_1, s_2, \cdots, s_n\}$ is a finite state set, Σ is a finite alphabet, $s_1 \in S$ is the initial state, $S_a \subseteq S$ is the accepting set, $\delta : S \times \Sigma \to S$ is a state transition function,[2] for example, $\delta(s, \sigma) = t$ means that the current state s changes to t when scanning σ.

We can also describe a DFA using the matrix notation. Let A_σ be an $|S| \times |S|$ matrix such that $A_\sigma[i, j] = \delta(s_j, \sigma, s_i)$. Then A_σ satisfies that each column has exact one 1 and else 0. Let π be a column vector with the first entry being 1 and else 0. Let η be a row vector satisfying $\eta_i = 1$ if $s_i \in S_a$ and $\eta_i = 0$ if $s_i \notin S_a$. Define a function $f_A : \Sigma^* \to \{0, 1\}$ as

$$f_A(x) = \eta A_{x_{|x|}} \cdots A_{x_2} A_{x_1} \pi.$$

---

[2] Without loss of generality, it is required that δ is a total function.

Then $f_A(x) = 1$ iff A accepts x. If we relax π to be a probabilistic distribution and $A(\sigma)$ to be a stochastic matrix (each column is a probabilistic distribution), then we get a probabilistic finite automaton (PFA).

3. Controlled operations

Recall that in quantum information, there are a useful class of operations (gates) acting on composite systems, called *controlled-U gates* [19], which capture the idea "If A is true, then do B". A controlled-U gate acting on two qubits has this action: $|c\rangle|t\rangle \longrightarrow |c\rangle U^c|t\rangle$ (where c is the control bit, and t is the target bit; if $c = 1$, then U is performed on the target qubit; else, no change).

How about the idea "If A is ture, then do B_1; else, do B_2"? This can be represented as: $|c\rangle|t\rangle \longrightarrow |c\rangle U_c|t\rangle$, which means that if $c = 0$, then U_0 is performed on the target bit; else, U_1 is performed. Actually, this conditional operation can be generalized to a general bipartite system $\mathcal{H}_1 \otimes \mathcal{H}_2$ in the following form

$$\sum_{i=1}^{n} |i\rangle\langle i| \otimes V_i$$

where $\{|i\rangle\}_{i=1}^n$ is an orthonormal basis of $\mathcal{H}_1$ and $\{V_i\}_{i=1}^n$ are unitary operators on Hilbert space $\mathcal{H}_2$.

Next, we extend the above conditional operation to quantum operations. Suppose that there is a projective measurement $\{P_i\}_{i=1}^n$ with n outcomes on $\mathcal{H}_1$ and there are a set of quantum operations $\{\mathcal{E}_i\}_{i=1}^n$ on $\mathcal{H}_2$. The behavior of the bipartite system is: if the first subsystem was measured in result i, then $\mathcal{E}_i$ is performed on the second subsystem. This behavior can be described by a quantum operation $\mathcal{E}$ that has the following operation elements

$$\{P_i \otimes E_k^i : i = 1, \cdots, n, k \in K_i\}$$

where $\{E_k^i\}_{k\in K_i}$ are operation elements of $\mathcal{E}_i$, that is, $\mathcal{E}_i(\rho) = \sum_{k\in K_i} E_k^i \rho {E_k^i}^\dagger$. It is to check that

$$\sum_{i=1}^{n} \sum_{k\in K_i} (P_i \otimes E_k^i)^\dagger (P_i \otimes E_k^i) = I.$$

Furthermore, for $\rho \otimes \varrho \in L(\mathcal{H}_1 \otimes \mathcal{H}_2)$, we have

$$\mathcal{E}(\rho \otimes \varrho) = \sum_{i=1}^{n} P_i \rho P_i \otimes \mathcal{E}_i(\varrho),$$

which captures the idea: if ρ was measured in i, then $\mathcal{E}_i$ is performed on ϱ.

In the above process, if the measurement $\{P_i\}_{i=1}^n$ is replaced by another general quantum operation $\mathcal{F}$ which is give by $\{F_i\}_{i=1}^n$ satisfying $\sum_{i=1}^n F_i^\dagger F_i = I$ where $F_i \in L(\mathcal{H}_1)$, then we get a new quantum operation $\mathcal{E}'$ that has the following effect

$$\mathcal{E}'(\rho \otimes \varrho) = \sum_{i=1}^n F_i \rho F_i^\dagger \otimes \mathcal{E}_i(\varrho),$$

where which $\mathcal{E}_i$ is to be performed on ϱ is depended on the performance of $\mathcal{F}$ on ρ.

These controlled operations mentioned above will be useful in the reminder of this paper.

4. Characterizations of hybrid models of QFA

In this section, we will characterize several existing hybrid models of QFA which consist of a quantum component and a classical component. We provide an intuitive insight into the structure of these hybrid models, and show that all of them can be simulated exactly[3] by the model of 1QFA with quantum operations. In addition, we also mention that an early proposed model called ancilla QFA [21] represents the same model as 1QFA with quantum operations, and an ancilla QFA can also be regarded as a quantum sequential machine [22, 14] assigned with some accepting states.

In the following, a finite (basic) state set is usually denoted by $Q = \{q_1, q_2, \cdots, q_n\}$. $\mathcal{H}_Q$ denotes the Hilbert space spanned by Q, which means that $\mathcal{H}_Q = span\{|q_i\rangle : i = 1, \cdots, n\}$ where each $|q_i\rangle$ is an n-dimensional column vector having 1 as the ith entry and 0 else. $L(\mathcal{H}_Q)$ denotes the set of all linear operator acting on $\mathcal{H}_Q$.

4.1. One-way QFA with quantum operations

In this subsection, we first recall the definition of 1QFA with quantum operations. For simplicity, we use the abbreviation MO-1gQFA (measured-once one-way general QFA) to denote this model, in accord with the name used in [13]. Afterwards, we clarify the relationship of this model to ancilla QFA [21] and quantum sequential machines [22, 14].

Definition 1. An MO-1gQFA is a five-tuple $\mathcal{M} = (Q, \Sigma, \{\mathcal{E}_\sigma\}_{\sigma\in\Sigma}, q_1, Q_a)$, where $Q = \{q_1, q_2, \cdots, q_n\}$ is a finite state set, Σ is a finite input alphabet,

---

[3] A QFA simulating another one exactly means that they have the same accepting probability for each input string.

$q_1 \in Q$ is the initial state, $\mathcal{E}_\sigma$ for each $\sigma \in \Sigma$ is a quantum operation having operation elements $\{E_1^\sigma, \cdots, E_k^\sigma\}$[4] satisfying $\sum_{i=1}^k E_i^{\sigma\dagger} E_i^\sigma = I$, and $Q_a \subseteq Q$ denotes the accepting state set, associated with a projector $P_a = \sum_{q \in Q_a} |q\rangle\langle q|$.

Given an input string, the machine starts with q_1 and scans input symbols from left to right. On scanning a symbol σ, the quantum operation $\mathcal{E}_\sigma$ is performed on the current state, resulting in a new state. After the last symbol has been scanned, a projective measurement is performed, determining to reject or accept.

MO-1gQFA are thought to be a nice definition of QFA, since they possess nice closure properties and have a competitive computational power with their classical counterparts. This model has been studied in [9, 10, 13, 26]. It is, however, worth mentioning that early before Hirvensalo [9, 10] suggested to study this model, an equivalent model called ancilla QFA had already been given by Paschen [21]. Ancilla QFA seem to have been forgotten by most of us, but they actually represent the same model as MO-1gQFA. In the following, we first recall the definition of ancilla QFA that has a one-way tape head.

Definition 2. An ancilla QFA is a six-tuple $\mathcal{M} = (Q, \Sigma, \Omega, \delta, q_1, Q_a)$, where Q, Σ, q_1 and Q_a are defined as before, Ω is a finite output alphabet, and the transition function $\delta : Q \times \Sigma \times Q \times \Omega \longrightarrow \mathbb{C}$ satisfies

$$\sum_{p \in Q, \omega \in \Omega} \delta(q_1, \sigma, p, \omega)^* \delta(q_2, \sigma, p, \omega) = \begin{cases} 1, & q_1 = q_2 \\ 0, & q_1 \neq q_2 \end{cases} \tag{3}$$

for all states $q_1, q_2 \in Q$ and $\sigma \in \Sigma$.

In the above definition, for $\sigma \in \Sigma$ and $\omega \in \Omega$, define an operator $V_{\sigma,\omega}$ such that

$$V_{\sigma,\omega} = \sum_{q_i, q_j \in Q} \delta(q_j, \sigma, q_i, \omega) |q_i\rangle\langle q_j|.$$

Furthermore, define

$$V_\sigma = \sum_{\omega \in \Omega} V_{\sigma,\omega} \otimes |\omega\rangle.$$

---

[4] It can be assumed that for all σ, the numbers of operation elements of $\mathcal{E}_\sigma$ are the same, since we can get a maximal k for all σ and then add zero operator to those whose number of elements is less than k.

In matrix notations, we have

$$V_\sigma = \begin{pmatrix} V_{\sigma,\omega_1} \\ V_{\sigma,\omega_2} \\ \vdots \\ V_{\sigma,\omega_k} \end{pmatrix},$$

which is a $|\Omega||Q| \times |Q|$ matrix. Then, Equation (3) is equivalent to

$$V_\sigma^\dagger V_\sigma = \sum_{\omega\in\Omega} V_{\sigma,\omega}^\dagger V_{\sigma,\omega} = I,$$

which means that V_σ is an isometric operator from $\mathcal{H}_Q$ to $\mathcal{H}_Q \otimes \mathcal{H}_\Omega$.

Note that performing V_σ on state q_j has the following effect:

$$V_\sigma|q_j\rangle = \sum_{q_i\in Q,\omega\in\Omega} \delta(q_j,\sigma,q_i,\omega)|q_i\rangle|\omega\rangle.$$

Suppose now that the machine is fed with σ in the current state ρ. Then after scanning σ, the state evolves to

$$\rho' = \mathrm{Tr}_\Omega(V_\sigma\rho V_\sigma^\dagger) = \mathrm{Tr}_\Omega\left(\sum_{\omega,\omega'\in\Omega} V_{\sigma,\omega}\rho V_{\sigma,\omega'}^\dagger \otimes |\omega\rangle\langle\omega'|\right) = \sum_{\omega\in\Omega} V_{\sigma,\omega}\rho V_{\sigma,\omega}^\dagger.$$

Thus, for each $\sigma\in\Sigma$, the evolution of the machine is characterized by a quantum operation $\mathcal{E}_\sigma$ that has operation elements $\{V_{\sigma,\omega} : \omega\in\Omega\}$. As a result, an ancilla QFA is indeed an MO-1gQFA.

On the other hand, given an MO-1gQFA in Definition 1, we can construct an ancilla QFA such that $\delta(q_j,\sigma,q_i,\omega) = \langle q_i|E_{\sigma,\omega}|q_j\rangle$ where $\omega\in\Omega = \{1,2,\cdots,k\}$. The result ancilla QFA has the same behavior with the given MO-1gQFA. Consequently, Definitions 1 and 2 represent the same model, but in different forms.

The above precess is summarized as follows.

Fact 1. *MO-1gQFA and ancilla QFA represent the same model.*

Remark 1. For ancilla QFA, one could have the question: how to deal with the output symbol at each step? A direct solution is to keep the output symbol at each step in an output tape, but one could worry that this will lead to that ancilla QFA are not properly finite, sine the length of the output tape depends on the input. On the other hand, the output tape is never read in the evolution of ancilla QFA. Thus, one can simply assume that the output symbol is reset at every step, and we adopt this assumption in this paper. However, it could be argued that resetting a symbol is an irreversible operation. If one cares this, he can refer to Paschen [21] for a more complicated solution which is completely reversible and keeps the output tape's length constant. Note that a similar problem was also faced by MO-1gQFA, and Hirvensalo [9, 10] gave a reply.

As shown in the above process, for ancilla QFA the transition function δ induces a set of isometric operator $\{V_\sigma\}_{\sigma\in\Sigma}$, and vice-versa. Hence, hereafter we always represent an acinlla QFA by $\mathcal{M} = (Q, \Sigma, \Omega, \{V_\sigma\}_{\sigma\in\Sigma}, q_1, Q_a)$ where V_σ's are isometric operators.

In [21], it was shown that for any regular language, there exists an ancilla QFA to recognize it with certainty. Given that this result will be used later, we elaborate the construction process in the following. Our construction has a slight difference from the original one in [21]. Suppose that there is a DFA $\mathcal{A} = (S, \Sigma, \delta, s_1, S_a)$. We construct an ancilla QFA $\mathcal{M} = (S, \Sigma, \Omega, \{V_\sigma\}_{\sigma\in\Sigma}, s_1, S_a)$ that has the same state set, alphabet, initial state, and accepting set with $\mathcal{A}$ and has an additional output alphabet Ω that is simply set to be S. For each $\sigma \in \Sigma$, V_σ is given by

$$V_\sigma = \sum_{s\in S} |\delta(s,\sigma)\rangle\langle s| \otimes |s\rangle_\Omega$$

where $|s\rangle_\Omega$ means that at each step, the machine simply writes the current state s as its output symbol. It is easily verified that $V_\sigma^\dagger V_\sigma = I_S$ where I_S denotes the identity on Hilbert space $\mathcal{H}_S$. Furthermore, it is readily seen that the constructed ancilla QFA $\mathcal{M}$ satisfies the following properties:

- at any time, the state has the form $|s_i\rangle\langle s_i|$ where $s_i \in S$;
- $|t\rangle\langle t| = \mathrm{Tr}_\Omega(V_\sigma|s\rangle\langle s|V_\sigma^\dagger)$ iff $t = \delta(s,\sigma)$ for $\sigma \in \Sigma$.

If let $E_s^\sigma = |\delta(s,\sigma)\rangle\langle s|$ where $s \in S$, then for each $\sigma \in \Sigma$, we get a quantum operation $\mathcal{E}_\sigma$ as $\mathcal{E}_\sigma(\rho) = \sum E_s^\sigma \rho E_s^{\sigma\dagger}$ and it satisfies that $|t\rangle\langle t| = \mathcal{E}_\sigma(|s\rangle\langle s|)$ iff $t = \delta(s,\sigma)$. Thus, we get an MO-1gQFA $\mathcal{M}' = (S, \Sigma, \{\mathcal{E}_\sigma\}_{\sigma\in\Sigma}, s_1, S_a)$ simulating exactly the given DFA $\mathcal{A}$.

The above process is summarized in the following result.

Fact 2. *For each DFA, there exists an MO-1gQFA (or ancilla QFA) simulating it exactly.*

Interestingly, the idea behind ancilla QFA was ever used in [20] to construct quantum interact proof systems (QIP systems, for short), although the authors might not be aware of this. In [20], the authors presented an application of QFA to QIP systems where there was a result asserting that each regular language can be recognized by a QIP system that takes a 1QFA as a verifier ([20], Proposition 4.2). When referring to the proof of that result, one can find that the verifier constructed in [20] is very similar to the ancilla QFA that we constructed above to simulate a DFA. In that QIP system, at each step the verifier (i.e., a 1QFA) simulates a DFA's behavior and writes its current state as an output symbol that is to be erased by the prover.

More interestingly, the model of ancilla QFA has closed relation to another quantum model called *quantum sequential machines* (QSM)[5] [22, 14]. For clearly explaining this point, we first recall the definition of QSM.

Definition 3. A QSM is a five-tuple $\mathcal{M} = (S, s_1, I, O, \delta)$, where S is a finite set of internal states, $s_1 \in S$ is the initial state, I and O are finite input and output alphabets, respectively, and $\delta : I \times S \times O \times S \to \mathbb{C}$ is a transition function that satisfies

$$\sum_{y\in O, t\in S} \delta(x, s, y, t)\delta(x, s', y, t)^* = \begin{cases} 0 & s \neq s', \\ 1 & s = s' \end{cases} \tag{4}$$

for all states $s, s' \in S$ and every $x \in I$.

Intuitively we interpret $\delta(x, s, y, t)$ as the transition amplitude that $\mathcal{M}$ prints y and enters state t after scanning x in the current state s. Thus, given an input string $\mathbf{x} = x_1 \cdots x_n \in I^*$, QSM $\mathcal{M}$ prints $\mathbf{y} = y_1 \cdots y_n \in O^*$ with a certain probability, denoted by $p(\mathbf{y}|\mathbf{x})$. In a QSM, what we care is the probability $p(\mathbf{y}|\mathbf{x})$ instead of acceptance or rejection.

Remark 2. Now, if some accepting states are assigned to QSM $\mathcal{M}$, and we no longer care what is the output, but focus on the accepting probability of the input, then we get an ancilla QFA. In a word, an ancilla QFA is essentially a quantum sequential machine assigned with some accepting states.

In the reminder of this paper, we will characterize the structure of several hybrid models of QFA and show that all of them can be simulated exactly by MO-1gQFA and thus by ancilla QFA. Of course, one can simulate each coming hybrid model directly by ancilla QFA, which does not present any obstacle to us, but in the following we stick to using MO-1gQFA as our basic model, since MO-1gQFA have been widely accepted. Before doing that, we first recall a result that characterizes the languages recognized by MO-1gQFA.

---

[5] This model was also called *sequential quantum machines*, but we stick here to the name QSM.

Theorem 1 ([13])**.** *(i) The languages recognized by MO-1gQFA are regular languages; (ii) for each regular language, there exists an MO-1gQFA recognizing it.*

4.2. One-way QFA with control language

Bertoni *et al* [6] introduced an QFA model called *one-way QFA with control language* (CL-1QFA, for short). The formal definition is as follows.

Definition 4. A CL-1QFA is a six-tuple $\mathcal{M} = (Q, \Sigma, \{U_\sigma\}_{\sigma\in\Sigma}, q_1, \mathcal{C}, \{P_{c_i}\}_{c_i\in\mathcal{C}}, \mathcal{L})$, where Q, Σ, and q_1 are defined as in the case of MO-1gQFA, U_σ is a unitary operator for each $\sigma \in \Sigma$, $\mathcal{C} = \{c_1, \dots, c_k\}$ is the set of possible outcomes associated with a projective measurement $\{P_{c_i}\}_{i=1}^{k}$, and $\mathcal{L} \subseteq \mathcal{C}^*$ is a regular language (called control language).

In CL-1QFA $\mathcal{M}$, on scanning a symbol σ, a unitary operator U_σ is first applied and in succession the projective measurement with outcome set $\mathcal{C}$ is performed. Thus, on an input word $x \in \Sigma^*$, the computation displays a sequence $y \in \mathcal{C}^*$ of measurement results with a certain probability $p(y|x)$ that is given by

$$p(y_1 \dots y_n|x_1 \dots x_n) = \left\| \prod_{i=1}^{n} (P_{y_i} U_{x_i}) |q_1\rangle \right\|^2 \tag{5}$$

where we define $\prod_{i=1}^{n} A_i = A_n A_{n-1} \cdots A_1$. The computation is said to be *accepted* if and only if y belongs to a fixed regular language $\mathcal{L} \subseteq \mathcal{C}^*$. Visually, Bertoni *et al* [6] called language $\mathcal{L}$ *control language.* Thus the probability of $\mathcal{M}$ accepting x is

$$P_{\mathcal{M}}(x) = \sum_{y_1 \dots y_n \in \mathcal{L}} p(y_1 \dots y_n|x_1 \dots x_n). \tag{6}$$

At first glance, the behavior of CL-1QFA is different from the conventional QFA. However, in the following we will show that a CL-1QFA is actually a special instance of MO-1gQFA. For that, we first clarify the structure of CL-1QFA. A CL-1QFA essentially consists of two components:

(i) the quantum component that undertakes unitary operators and projective measurements;

(ii) the classical component, i.e., a DFA accepting the control language $\mathcal{L}$.

Note that the alphabet of the DFA accepting $\mathcal{L}$ is the set of outcomes produced by the measurement of the quantum component. Thus, communication occurs from the quantum component to the classical one. This is illustrated in Figure 1.

In the following, we shows that for a given CL-1QFA $\mathcal{M}$, there exists an MO-1gQFA simulating it exactly.

Theorem 2. *Given a CL-1QFA* $\mathcal{M}$ *with control language* $\mathcal{L}$ *accepted by a DFA* $\mathcal{A}$*, there exists an MO-1gQFA* $\widehat{\mathcal{M}}$ *simulating it exactly, with state set* $Q \times S$ *where* Q *and* S *are state sets of* $\mathcal{M}$ *and* $\mathcal{A}$*, repsetively.*

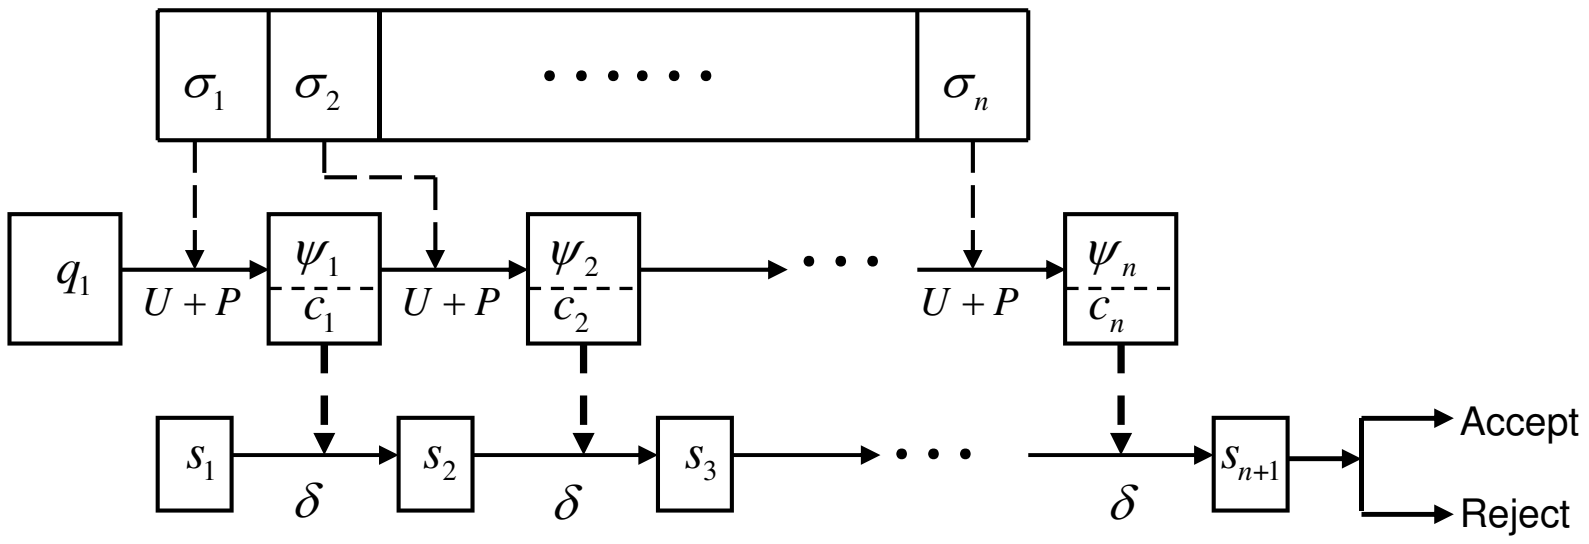

Figure 1: A CL-1QFA is essentially a hybrid model consisting of two components: the quantum component and the classical component where one-way communication is allowed from the quantum component to the classical one. On scanning input symbol σ_i, the machine operates as follows. (i) First, in the quantum component, a unitary operation U_{σ_i} is applied and in succession a projective measurement $\{P_c : c \in \mathcal{C}\}$ is performed, resulting in state ψ_i and producing outcome c_i with some probability. (ii) Next, in the classical component (i.e., the DFA accepting the control language $\mathcal{L}$), once the measurement outcome, say c_i, has been produced, the DFA scans c_i and changes its current state s_i to a new one $s_{i+1} = \delta(s_i, c_i)$. The final state s_{n+1} enters into an accepting state iff the sequence $c_1c_2\cdots c_n \in \mathcal{L}$. Note that there exists communication from the quantum component to the classical one, indicated by thick dashed lines, but no in the opposite direction.

Proof. The idea is that: there exist two QFA simulating the quantum component and the classical component, respectively, and the communication from one to another can be modeled by the controlled operation introduced in Section 3.

The quantum component is represented by an MO-1gQFA

$$\mathcal{A}_1 = (Q, \Sigma, \{\mathcal{E}_\sigma\}_{\sigma\in\Sigma}, q_1, Q_a) \tag{7}$$

where Q, Σ and q_1 are the same as the ones in CL-1QFA $\mathcal{M}$, Q_a is simply set to be Q, and for each $\sigma \in \Sigma$, $\mathcal{E}_\sigma$ acting on $L(\mathcal{H}_Q)$ is represented by the set of operation elements $\{E_c^\sigma\}_{c\in\mathcal{C}}$ where

$$E_c^\sigma = P_c U_\sigma \tag{8}$$

and $\{P_c\}_{c\in\mathcal{C}}$ is the projective measurement in CL-1QFA $\mathcal{M}$.

The classical component (i.e., the DFA accepting the control language $\mathcal{L}$) can also be represented by an MO-1gQFA. Suppose that $\mathcal{A}_2 = (S, \mathcal{C}, \delta, s_1, S_a)$ is a minimal DFA accepting $\mathcal{L}$. Then by Fact 2, there exists an MO-1gQFA $\mathcal{A}_2' = (S, \mathcal{C}, \{\mathcal{F}_c\}_{c\in\mathcal{C}}, s_1, S_a)$ that has the same state set, alphabet, initial state, and accepting set with $\mathcal{A}_2$, and for each $c \in \mathcal{C}$, $\mathcal{F}_c$ acting on $L(\mathcal{H}_S)$ is represented by the operator set $\{F_s^c\}_{s\in S}$ where $F_s^c = |\delta(s,c)\rangle\langle s|$. By this, it satisfies that $|t\rangle\langle t| = \mathcal{F}_c(|s\rangle\langle s|)$ iff $t = \delta(s,c)$.

Now we construct an MO-1gQFA $\widehat{\mathcal{M}} = (\widehat{Q}, \Sigma, \{\widehat{\mathcal{E}}_\sigma\}_{\sigma\in\Sigma}, \widehat{q}_1, \widehat{Q}_a)$ from $\mathcal{A}_1$ and $\mathcal{A}_2'$ such that

- $\widehat{Q} = Q \times S$;
- $\widehat{q}_1 = (q_1, s_1)$;
- $\widehat{Q}_a = Q \times S_a$, associated with projector

  $$\widehat{P}_a = I_Q \otimes \sum_{s\in S_a} |s\rangle\langle s|$$

  where I_Q is the identity operator on Hilbert space $\mathcal{H}_Q$;
- for each $\sigma \in \Sigma$, $\widehat{\mathcal{E}}_\sigma$ acting on $L(\mathcal{H}_{\widehat{Q}})$ is constructed from $\mathcal{E}_\sigma$ and the set $\{\mathcal{F}_c\}_{c\in\mathcal{C}}$. Specifically, $\widehat{\mathcal{E}}_\sigma$ has operation elements $\{\widehat{E}_{c,s}^\sigma\}_{c\in\mathcal{C},s\in S}$ where

  $$\widehat{E}_{c,s}^\sigma = E_c^\sigma \otimes F_s^c = P_c U_\sigma \otimes |\delta(s,c)\rangle\langle s|.$$

  The above set satisfying the completeness condition is easy to verify. Furthermore, for $\rho \otimes \varrho \in L(\mathcal{H}_Q \otimes \mathcal{H}_S)$, we have

  $$\widehat{\mathcal{E}}_\sigma(\rho \otimes \varrho) = \sum_{c\in\mathcal{C}} P_c U_\sigma \rho U_\sigma^\dagger P_c \otimes \mathcal{F}_c(\varrho).$$

Now let us check the behavior of $\widehat{\mathcal{M}}$ on an input string. Suppose that $\widehat{\mathcal{M}}$ starts with the initial state (q_1, s_1), and scans a symbol σ. Then the result state is

$$\begin{aligned}
\rho &= \widehat{\mathcal{E}}_\sigma(|q_1\rangle\langle q_1| \otimes |s_1\rangle\langle s_1|) \\
&= \sum_{c\in\mathcal{C}} P_c U_\sigma |q_1\rangle\langle q_1| U_\sigma^\dagger P_c \otimes \mathcal{F}_c(|s_1\rangle\langle s_1|) \\
&= \sum_{c\in\mathcal{C}} P_c U_\sigma |q_1\rangle\langle q_1| U_\sigma^\dagger P_c \otimes |t\rangle\langle t|
\end{aligned}$$

where $t = \delta(s_1, c)$ as mentioned before. In this way, after scanning the whole input $x = x_1x_2\cdots x_n$, the final state is

$$\rho_x = \sum_{y\in\mathcal{C}^n} |\phi_y\rangle\langle\phi_y| \otimes |s_y\rangle\langle s_y|$$

where $|\phi_y\rangle = \prod_{i=1}^n (P_{y_i}U_{x_i})|q_1\rangle$ and $s_y = \delta^*(s_1, y)$.[6] Note that $s_y \in S_a$ iff $y \in \mathcal{L}$. Thus the probability of $\widehat{\mathcal{M}}$ accepting x is given by

$$\begin{aligned} P_{\widehat{\mathcal{M}}}(x) &= \mathrm{Tr}(\widehat{P}_a\rho_x) = \mathrm{Prob}\{s_y \in S_a\} = \mathrm{Prob}\{y \in \mathcal{L}\} \\ &= \mathrm{Tr}(\sum_{y\in\mathcal{L}} |\phi_y\rangle\langle\phi_y|) = \sum_{y_1y_2\cdots y_n\in\mathcal{L}} \left\| \prod_{i=1}^n P_{y_i}U_{x_i}|q_1\rangle \right\|^2, \end{aligned}$$

which gives the same value as Equation (6). Therefore, we have completed the proof. □

Remark 3. In [6] it was proven that the languages recognized by CL-1QFA are regular languages. This result is indeed a corollary from Theorem 2 and item (i) in of Theorem 1. In addition, in [18] it was shown that for each regular language, there exists a CL-1QFA recognizing it. The idea can be described in Figure 1 as follow. First, the quantum component in Figure 1 is elaborately designed to function as a bijective mapping from Σ^* to $\mathcal{C}^*$, so that each regular language $\mathcal{L} \subseteq \Sigma^*$ is mapped to a regular language $\mathcal{L}' \subseteq \mathcal{C}^*$. Then the classical component in Figure 1 is designed to be a DFA accepting $\mathcal{L}'$.

Remark 4. In Definition 4, if a quantum operation instead of a unitary operator is performed on scanning a symbol, then we get a more general model, and we call this model *one-way general QFA with control language* (CL-1gQFA, for short), represented by $\mathcal{M} = (Q, \Sigma, \{\mathcal{E}_\sigma\}_{\sigma\in\Sigma}, q_1, \mathcal{C}, \{P_{c_i}\}_{c_i\in\mathcal{C}}, \mathcal{L})$. It is readily seen that the above process can be extended to this general model, and thus we obtain that for a given CL-1gQFA, there exists an MO-1gQFA simulating it exactly.

4.3. 1QFA with quantum operations are not necessary to be measured many times

As we know, for the two early proposed 1QFA models: measured-once 1QFA (MO-1QFA)[17] and measured-many 1QFA (MM-1QFA) [11], it has been shown that MM-1QFA are more powerful than MO-1QFA. Thus, when defining a new

---

[6] $\delta^* : \mathcal{C}^* \to S$ is defined by: i) $\delta^*(s, \epsilon) = s$, and ii) $\delta^*(s, yc) = \delta(\delta^*(s, y), c)$.

QFA model, one often follows this line: define a measured-once version accompanied with a measured-many version. However, many times of measurements do not always lead to enhancement on the computation power, as shown in [13] that MO-1gQFA and their measured-many versions, denoted by MM-1gQFA, have the same language recognition power. Nevertheless, a slightly unsatisfactory point in [13] is that it has not been shown that for a given MM-g1QFA, there exists an MO-g1QFA simulating it exactly. In fact, this is true. Here we explain this fact in more details by dint of the model of CL-1gQFA mentioned in Remark 4. By the way, this point can be explained from different viewpoints, for instance, [26] provided a concise explanation.

An MM-1gQFA can be obtained from an MO-1gQFA by dividing the state set Q into three disjoint subsets Q_a, Q_r and Q_n denoting the accepting, rejecting, and non-halting set, respectively, and by performing a projective measurement onto the subspaces spanned by the three subsets when scanning each symbol. Explicitly, an MM-1gQFA is a seven-tuple $\mathcal{M} = (Q, \Sigma, \{\mathcal{E}_\sigma\}_{\sigma\in\Sigma}, q_1, Q_a, Q_r, Q_n)$. On scanning an input symbol σ, first $\mathcal{E}_\sigma$ is applied on the current state, and then a measurement denoted by $\{P_a, P_r, P_n\}$ where $P_\tau = \sum_{q\in Q_\tau} |q\rangle\langle q|$ $(\tau = a, r, n)$ is performed. If the outcome is a (r), then the machine halts by acceptance (rejection); else, it continues to scan the next symbol.

We explain that for a given MM-1gQFA, there exists an MO-1gQFA simulating it exactly. It follows from Remark 4 that it is sufficient to show there exists a CL-1gQFA simulating a given MM-1gQFA. Indeed, MM-1gQFA $\mathcal{M}$ given above can be simulated by a CL-1gQFA $\mathcal{M}' = (Q, \Sigma, \{\mathcal{E}_\sigma\}_{\sigma\in\Sigma}, q_1, \mathcal{C}, \{P_{c_i}\}_{c_i\in\mathcal{C}}, \mathcal{L})$ with $\mathcal{C} = \{a, r, n\}$, $\{P_a, P_r, P_n\}$ are the same as the ones given in $\mathcal{M}$, and $\mathcal{L} = n^*a\{a, r, n\}^*$, which is similar to the case that an MM-1QFA can be simulated by a CL-1QFA as pointed out in [6].

Therefore, for 1QFA with quantum operations, it is not necessary to introduce their measured-many versions. It is, however, worth mentioning that difference still appears between the two versions if what we care is not the language recognition power, but some thing else, e.g., the expected running time, since a measure-many model can halt midway, but a measure-once model can halt only at the end of the input. The expected running time sometimes interests us. For instance, a *quantum programm* with a terminal (absorbing) space [27] can be regarded as an MM-1gQFA. More specifically, a quantum program can be represented by $\mathcal{P} = (\mathcal{H}, \mathcal{E}, \rho_0, \{M_0, M_1\})$ where $\mathcal{H}$ is a Hilbert space, $\mathcal{E}$ is a quantum operation, ρ_0 is the initial state, $\{M_0, M_1\}$ is a yes-no measurement. The program executes with initial state ρ_0, and performs $\mathcal{E}$ to evolve into another state. At the end of each step, we check whether the program reaches a terminal state or not by performing the measurement $\{M_0, M_1\}$. If the outcome is 0, then the program terminates; otherwise, the program enters the next step and continues to perform the quantum operation $\mathcal{E}$. A vital property of the quantum program is the excepted running time. It is readily seen that the program is essentially an MM-1gQFA, but it is not suitable to replace it with an MO-1gQFA.

4.4. QFA with quantum and classical states

Ambainis and Watrous [4] proposed the model of *two-way QFA with quantum and classical states* (2QCFA, for short). The tape head of 2QCFA is classical, i.e., the movement of the tape head is regulated by a classical transition function. In spite of this restriction, 2QCFA are still more powerful that their classical counterparts. Indeed, as proved in [4], 2QCFA can recognize with bounded error non-regular languages $L_{eq} = \{a^n b^n | n > 0\}$ in polynomial time and palindrome language $L_{pal} = \{x \in \{a, b\}^* | x = x^R\}$ in exponential time. Note that no 2PFA can recognize with bounded error non-regular language in polynomial time [12] and recognize with bounded error L_{pal} in any bounded time [8]. Therefore, 2QCFA are of particular interest and worthy of being characterized furthermore. For simplicity, in the following we first consider the one-way version of 2QCFA, denoted by 1QCFA. We will characterize the structure of 1QCFA using the approach developed before, and show that 1QCFA can be simulated by MO-1gQFA. All results obtained for 1QCFA can be extended to 2QCFA, which will be separately discussed in Subsection 4.6. The definition of 1QCFA is given as follows.

Definition 5. A 1QCFA is specified by a 8-tuple $\mathcal{M} = (Q, S, \Sigma, \Theta, \delta, q_1, s_1, S_a)$ where, Q and S are finite sets of quantum and classical states, respectively, $q_1 \in Q$ and $s_1 \in S$ are initial quantum and classical states, respectively, Σ is a finite alphabet, $S_a \subseteq S$ is the set of classical accepting states, Θ specifies the evolution of quantum states, and δ specifies the evolution of classical states. More specifically, Θ maps each pair $(s, \sigma) \in S \times \Sigma$ to a unitary operator or a projective measurement. In case $\Theta(s, \sigma)$ is a unitary operator, $\delta(s, \sigma)$ is an element of S specifying a new classical state. In case $\Theta(s, \sigma)$ is a measurement, $\delta(s, \sigma)$ maps the outcome to an element of S, i.e., $\delta(s, \sigma)(c)$ specifying a new classical state where c denotes a measurement outcome.

On a given input x, 1QCFA $\mathcal{M}$ operates as follows. Initially, the quantum state is in q_1 and the classical state is in s_1 and the tape head of $\mathcal{M}$ is scanning the leftmost symbol. Then $\mathcal{M}$ scans the input from left to right, changing its state according to Θ and δ. On scanning a symbol σ, the quantum state is first changed according to $\Theta(s,\sigma)$, where s is the current classical state and σ is the currently scanned tape symbol, and afterwards the classical state is changed according to $\delta(s,\sigma)$ (along with the particular result obtained from $\Theta(s,\sigma)$ in case $\Theta(s,\sigma)$ is a measurement). When all input symbols have been scanned, $\mathcal{M}$ checks whether its classical state is in S_a. If yes, the input is accepted; else, rejected.

For clarifying the structure of 1QCFA $\mathcal{M}$, we should take some technical treatments. For $s \in S$ and $\sigma \in \Sigma$, let $\mathcal{C}_{s,\sigma}$ be a finite set given by

$$\mathcal{C}_{s,\sigma} = \begin{cases} \{c_1, c_2, \cdots, c_k\}, & \text{if } \Theta(s,\sigma) \text{ is a measurement given by } \{P_{c_i}\}_{i=1}^{k}; \\ \{c_0\}, & \Theta(s,\sigma) \text{ is a unitray operator.} \end{cases} \tag{9}$$

In other words, $\mathcal{C}_{s,\sigma}$ denotes the performance result of $\Theta(s,\sigma)$ where in case $\Theta(s,\sigma)$ is a measurement, $\mathcal{C}_{s,\sigma}$ records the set of possible outcomes, and in case $\Theta(s,\sigma)$ is a unitary operator, we simply say it results in c_0, a particular element. No matter $\Theta(s,\sigma)$ is a measurement or a unitary operator, it is a quantum operation and can be represented as

$$\Theta(s,\sigma)(\rho) = \sum_{c_i \in \mathcal{C}_{s,\sigma}} E_{c_i} \rho E_{c_i}^{\dagger}. \tag{10}$$

In case $\Theta(s,\sigma)$ is a projective measurement, the elements $\{E_{c_i}\}$ are projectors. In case $\Theta(s,\sigma)$ is a unitary operator, the unique element is the unitary operator itself. Of course, the completeness condition $\sum_{c_i \in \mathcal{C}_{s,\sigma}} E_{c_i}^{\dagger} E_{c_i} = I$ is satisfied in both cases.

Denote

$$\mathcal{C} = \bigcup_{s \in S, \sigma \in \Sigma} \mathcal{C}_{s,\sigma}.$$

Then the classical component can be represented by a DFA

$$\mathcal{A} = (S, \Sigma \times \mathcal{C}, \widetilde{\delta}, s_1, S_a) \tag{11}$$

where S, s_1 and S_a are the same as defined in $\mathcal{M}$, $\Sigma \times \mathcal{C}$ is the alphabet of $\mathcal{A}$, and the transition function $\widetilde{\delta}$ is defined by

$$\widetilde{\delta}(s,(\sigma,c)) \begin{cases} \delta(s,\sigma), & \text{if } c = c_0; \\ \delta(s,\sigma)(c), & \text{else.} \end{cases} \tag{12}$$

The structure of a 1QCFA is illustrated in Figure 2, from which one can readily capture the idea behind it.

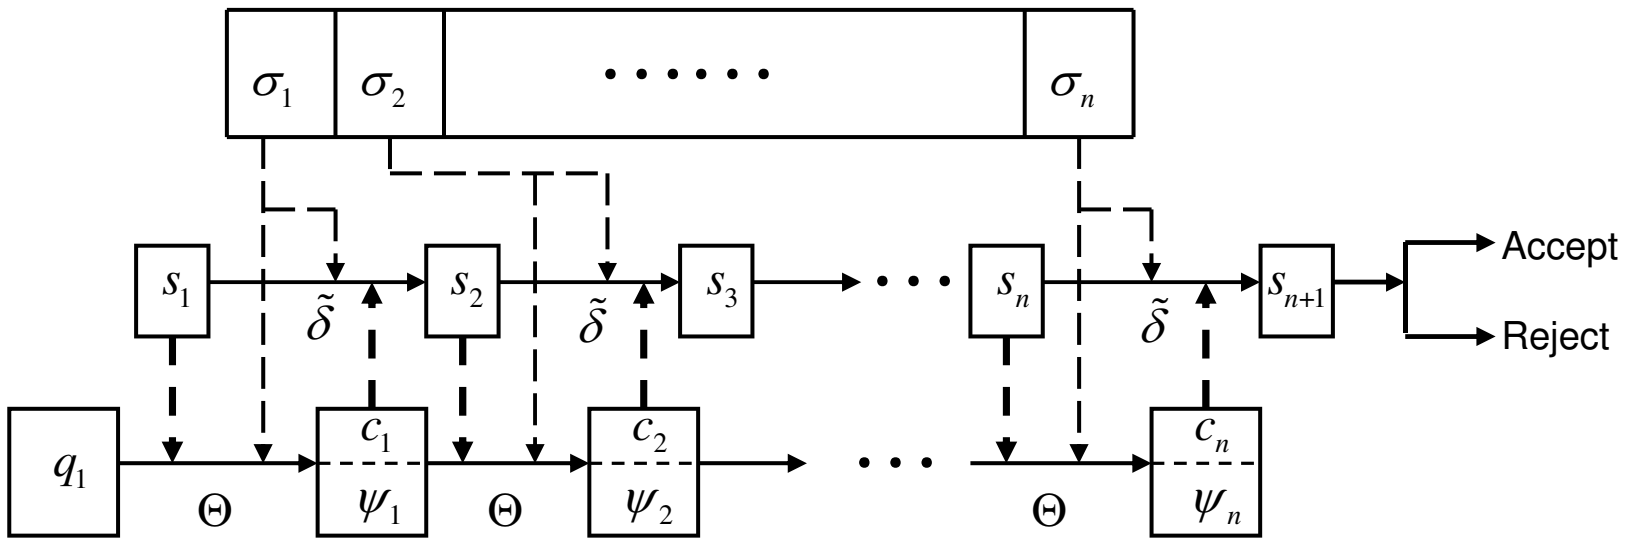

Figure 2: A 1QCFA is essentially a hybrid model consisting of two components: the quantum component and the classical component where two-way communication is allowable. On scanning input symbol σ_i, the machine operates as follows. (i) First, in the quantum component, a quantum operation $\Theta(s_i, \sigma_i)$ (a unitary operation or projective measurement) determined by the current classical state s_i and the currently scanned symbol σ_i is applied, resulting in a performance result (ψ_i, c_i) with some probability. (ii) Next, the classical component (i.e., a DFA) changes its current state s_i to a new one $s_{i+1} = \widetilde{\delta}(s_i, (\sigma_i, c_i))$, by scanning symbol σ_i and the performance result c_i produced by the quantum component. The machine accepts its input iff the final classical state s_{n+1} enters into an accepting state. Note that there exists two-way communication between the quantum component and the classical one, which is indicated by thick dashed lines.

Remark 5. In Figure 2, it can be found that a 1QCFA reduces to a CL-1QFA, if the following restrictions are made: (i) the communication is prohibited from the classical component to the quantum one, (ii) the quantum transition function Θ is restricted to the combination of a unitary operator and a projective measurement, and (iii) the classical transition function $\widetilde{\delta}$ has no dependence on the input symbol σ. As a result, CL-1QFA are included as a subset of 1QCFA. However, 1QCFA have not surpassed CL-1QFA in the sense of language recognition, since all of them recognize with bounded error regular languages. Thus, the communication from the classical component to the quantum component seems to be superfluous. Probably, two runs of communication are useful for saving states, which needs to be further considered.

Next, we show how an MO-1gQFA can be constructed to simulate 1QCFA $\mathcal{M}$ given in Definition 5. First, note that the quantum component has state space $\mathcal{H}_Q$ and its evolution operation is $\Theta(s, \sigma)$ given in Equation (10). Second, it follows from Fact 2 that for the classical component, i.e., the DFA given in Equation (11), there exists an MO-1gQFA

$$\mathcal{A}' = (S, \Sigma \times \mathcal{C}, \{\mathcal{F}_{\sigma,c}\}_{\sigma,c \in \Sigma \times \mathcal{C}}, s_1, S_a) \tag{13}$$

such that $|s\rangle\langle s| = \mathcal{F}_{\sigma,c}(|t\rangle\langle t|)$ iff $s = \widetilde{\delta}(t, (\sigma, c))$ for $(\sigma, c) \in \Sigma \times \mathcal{C}$.

Third, construct an MO-1gQFA $\widehat{\mathcal{M}} = (\widehat{Q}, \Sigma, \{\widehat{\mathcal{E}}_\sigma\}_{\sigma\in\Sigma}, \widehat{q}_1, \widehat{Q}_a)$ such that

- $\widehat{Q} = Q \times S$;
- $\widehat{q}_1 = (q_1, s_1)$;
- $\widehat{Q}_a = Q \times S_a$;
- $\{\widehat{\mathcal{E}}_\sigma\}_{\sigma\in\Sigma}$ is constructed below.

Each $\widehat{\mathcal{E}}_\sigma$ should model the interactive communication between the quantum and classical components. As shown in Figure 2, on scanning a symbol σ, the machine has two steps: (i) the evolution of the quantum component and (ii) the evolution of the classical component. In the first step, $\Theta_{s,\sigma}$ is chosen with dependence on the current classical state s. In the second step, $\mathcal{F}_{\sigma,c}$ is chosen with dependence on the performance result $c \in \mathcal{C}_{s,\sigma}$ of the first step. Thus, $\widehat{\mathcal{E}}_\sigma$ acting on $L(\mathcal{H}_Q \otimes \mathcal{H}_S)$ can be given by the following operation elements

$$\{E_{c_i} \otimes F_k E_s : s \in S, c_i \in \mathcal{C}_{s,\sigma}, k \in K_{\sigma,c_i}\} \tag{14}$$

where

- $E_s = |s\rangle\langle s|$ for $s \in S$, which is used to detect whether the current state is s;
- for a fixed s, $\{E_{c_i}\}_{c_i\in\mathcal{C}_{s,\sigma}}$ are operation elements of $\Theta(s, \sigma)$ as given in Equation (10);
- for a fixed c_i, $\{F_k\}_{k\in K_{\sigma,c_i}}$ are operation elements of $\mathcal{F}_{\sigma,c_i}$, that is, $\mathcal{F}_{\sigma,c_i}(\varrho) = \sum_{k\in K_{\sigma,c_i}} F_k \varrho F_k^\dagger$.

Note that these indexes have the following dependence relationship

$$S \xrightarrow{s} \mathcal{C}_{s,\sigma} \xrightarrow{c_i} K_{\sigma,c_i} \tag{15}$$

which means that when s is fixed, the set $\mathcal{C}_{s,\sigma}$ is chosen, and when c_i if fixed, K_{σ,c_i} is chosen.

Next we verify that $\widehat{\mathcal{E}}_\sigma$ given by Equation (14) has modeled the behavior of the original 1QCFA $\mathcal{M}$. First it satisfies the completeness condition:

$$\begin{aligned}
&\sum_{s\in S}\sum_{c_i\in\mathcal{C}_{s,\sigma}}\sum_{k\in K_{\sigma,c_i}}(E_{c_i}\otimes F_kE_s)^\dagger(E_{c_i}\otimes F_kE_s)\\
=&\sum_{s\in S}\sum_{c_i\in\mathcal{C}_{s,\sigma}}E_{c_i}^\dagger E_{c_i}\otimes E_s^\dagger\left(\sum_{k\in K_{\sigma,c_i}}F_kF_k^\dagger\right)E_s\\
=&\sum_{s\in S}\left(\sum_{c_i\in\mathcal{C}_{s,\sigma}}E_{c_i}^\dagger E_{c_i}\right)\otimes E_s^\dagger E_s\\
=&I_Q\otimes\sum_{s\in S}E_s^\dagger E_s=I_Q\otimes I_S.
\end{aligned}$$

Furthermore, for $\rho\otimes\varrho\in L(\mathcal{H}_Q\otimes\mathcal{H}_S)$, by a direct calculation we have

$$\widehat{\mathcal{E}}_\sigma(\rho\otimes\varrho)=\sum_{s\in S}\sum_{c_i\in\mathcal{C}_{s,\sigma}}E_{c_i}\rho E_{c_i}^\dagger\otimes\langle s|\varrho|s\rangle\mathcal{F}_{\sigma,c_i}(|s\rangle\langle s|).$$

The above equation intuitively captures the idea: if the current classical state is s, then $\Theta_{s,\sigma}$ is performed on the quantum component, and furthermore if the performance result of $\Theta_{s,\sigma}$ is c_i, then $\mathcal{F}_{\sigma,c_i}$ is performed on the classical component.

For example, given the initial state $|q_1\rangle|s_1\rangle$, we have

$$\begin{aligned}
\widehat{\mathcal{E}}_\sigma(|q_1\rangle\langle q_1|\otimes|s_1\rangle\langle s_1|)&=\sum_{c_i\in\mathcal{C}_{s_1,\sigma}}E_{c_i}|q_1\rangle\langle q_1|E_{c_i}^\dagger\otimes\mathcal{F}_{\sigma,c_i}(|s_1\rangle\langle s_1|)\\
&=\sum_{c_i\in\mathcal{C}_{s_1,\sigma}}E_{c_i}|q_1\rangle\langle q_1|E_{c_i}^\dagger\otimes|t_i\rangle\langle t_i|
\end{aligned}$$

where $t_i=\hat{\delta}(s_1,(\sigma,c_i))$.

From the above process, it can be seen that the constructed MO-1gQFA $\widehat{\mathcal{M}}$ simulates exactly the given 1QCFA $\mathcal{M}$. This is illustrated in Figure 3.

The above results are summarized in the following.

Theorem 3. *Given a 1QCFA $\mathcal{M}$ with Q and S as quantum and classical state sets,respectively, there exists an MO-1gQFA $\widehat{\mathcal{M}}$ simulating it exactly, with $Q\times S$ as the state set.*

Form Theorems 1 and 3, we immediately obtain that the languages recognized by 1QCFA are regular languages. At the same time, from Figure 2 it is readily seen that for each regular language $\mathcal{L}$, there exists a 1QCFA recognizing it. Specifically, in Figure 2 the classical component can be designed so that it ignores the performance of the quantum component and works a DFA to recognize $\mathcal{L}$. These results are summarized in the following.

$$
\begin{aligned}
|\psi\rangle &\xrightarrow{\Theta(s,\sigma)=\{E_{c_i}\}_{c_i\in\mathcal{C}_{s,\sigma}}} (E_{c_i}|\psi\rangle/\sqrt{p_i}, c_i)\\
s &\xrightarrow{\widetilde{\delta}(s,(\sigma,c_i))} t_i \text{ with probability } p_i = \|E_{c_i}|\psi\rangle\|^2
\end{aligned}
$$

$$
\begin{aligned}
|\psi\rangle|s\rangle \xrightarrow{\widehat{\mathcal{E}}_\sigma} \rho &= \sum_{c_i\in\mathcal{C}_{s,\sigma}} E_{c_i}|\psi\rangle\langle\psi|E_{c_i}^\dagger \otimes \mathcal{F}_{\sigma,c_i}(|s\rangle\langle s|)\\
&= \sum_{c_i\in\mathcal{C}_{s,\sigma}} E_{c_i}|\psi\rangle\langle\psi|E_{c_i}^\dagger \otimes |t_i\rangle\langle t_i|
\end{aligned}
$$

Figure 3: Simulating a step in a 1QCFA by one in an MO-1gQFA. The part above the line stands for an evolution step in a 1QCFA: with probability p_i, the current quantum state $|\psi\rangle$ evolves to $\frac{E_{c_i}|\psi\rangle}{\sqrt{p_i}}$, accompanied with performance result c_i (that denotes the measurement result if $\Theta(s,\sigma)$ is a measurement, else denotes c_0); consequently the classical state s evolves to t_i depending on c_i. The part under the line stands for an evolution step in an MO-1gQFA: the current state $|\psi\rangle|s\rangle$ evolves to ρ where the state $\frac{E_{c_i}|\psi\rangle}{\sqrt{p_i}}|t_i\rangle$ occurs with probability p_i. Therefore, the two machines have the same behavior.

Corollary 1. *1QCFA recognize exactly the class of regular languages.*

Another point worth mentioning is on the equivalence problem of 1QCFA. Two machines over the same input alphabet are said to be equivalent if they have the same accepting probability for each input string. The equivalence problem of a QFA model is that given any two machines of the same model, decide whether they are equivalent. This problem has been proven to be decidable for several quantum models [13, 14, 15, 23, 24]. Specially, it has been proven that two MO-1gQFA $\mathcal{M}_1$ and $\mathcal{M}_2$ are equivalent if and only if they have the same accepting probability for the input string with length no more than $n_1^2+n_2^2-1$ where n_1 and n_2 are the numbers of basic states of $\mathcal{M}_1$ and $\mathcal{M}_2$, respectively (see [13], Theorem 9).[7] This result together with Theorem 3 immediately leads to the decidability of equivalence problem of 1QCFA.

Corollary 2. *Two 1QFCA $\mathcal{M}_1$ and $\mathcal{M}_2$ are equivalent if and only if they have the same accepting probability for the input string with length no more than $(k_1n_1)^2+(k_2n_2)^2-1$ where k_i and n_i are the numbers of classical and quantum*

---

[7] In the original result, the bound was given by$(n_1+n_2)^2$, but it can be slightly improved to $n_1^2+n_2^2-1$ by a more careful analysis on the original proof.

states of $\mathcal{M}_i$, respectively, $i = 1, 2$.

Note that the above result also holds for CL-1QFA given in the previous subsection and 1QFAC appearing in the next subsection. Thus, the decidability of equivalence problem of CL-1QFA and 1QFA discussed in [15, 24] follows directly from this paper.

4.5. 1QFAC

Recently, Qiu, Mateus, and Sernadas [24] proposed a new 1QFA model named *1QFA together with classical states* (1QFAC, for short). Although the authors of [24] stressed that 1QFAC are not the one-way version of 2QCFA, 1QFAC share some common characters with 1QCFA (i.e., one-way version of 2QCFA) as shown below. Indeed, A 1QFAC is a hybrid model consisting of a quantum component and a classical component where communication is allowed from the classical component to the quantum one. The definition of 1QFAC is given as follows.

Definition 6. *A 1QFAC $\mathcal{A}$ is defined by a 9-tuple*

$$\mathcal{A} = (S, Q, \Sigma, \Gamma, s_1, q_1, \delta, \mathbb{U}, \mathcal{M})$$

where:

- Σ *is a finite set (the input alphabet);*
- Γ *is a finite set (the output alphabet);*
- S *is a finite set (the set of* classical states*);*
- Q *is a finite set (the* quantum state basis*);*
- s_1 *is an element of* S *(the* initial classical state*);*
- q_1 *is an element of* Q *(the* initial quantum state*);*
- $\delta : S \times \Sigma \to S$ *is a map (the* classical transition map*);*
- $\mathbb{U} = \{U_{s,\sigma}\}_{s\in S,\sigma\in\Sigma}$ *where* $U_{s,\sigma} : \mathcal{H}_Q \to \mathcal{H}_Q$ *is a unitary operator for each* s *and* σ *(the* quantum transition operator *at* s *and* σ*);*
- $\mathcal{M} = \{\mathcal{M}_s\}_{s\in S}$ *where each* $\mathcal{M}_s$ *is a projective measurement over* $\mathcal{H}_Q$ *with outcomes in* Γ *(the* measurement at s*).*

Let $\mathcal{M}_s = \{P_{s,\gamma}\}_{\gamma\in\Gamma}$ where $P_{s,\gamma}$'s are mutually orthogonal projectors and satisfy $\sum_{\gamma\in\Gamma} P_{s,\gamma} = I$. A specially case of the above definition is when $\Gamma = \{a, r\}$, where a denotes *accepting* and r denotes *rejecting*. In this case, $\mathcal{A}$ is an acceptor of languages over Σ. In this paper, when mentioning a 1QFAC, we always mean an acceptor.

The machine starts with the initial classical state s_1 and the initial quantum state q_1. On scanning an input symbol σ, $U_{s,\sigma}$ is first applied to the current quantum state, resulting in a new state, where s is the current classical state. Afterwards, the current classical state s changes to $t = \delta(s, \sigma)$. If the machine is in classical state s and quantum state $|\psi\rangle$ after scanning the whole input string, then a measurement $\mathcal{M}_s$ is performed on $|\psi\rangle$, giving the probability of accepting the input by $\|P_{s,a}|\psi\rangle\|^2$.

The structure of a 1QFAC is illustrated in Figure 4, which can be regarded as a variant of Figure 2 by restricting $\Theta(s, \sigma)$ to unitary operator $U_{s,\sigma}$ (thus no communication is required from the quantum part to the classical one) and by changing the acceptance fashion.

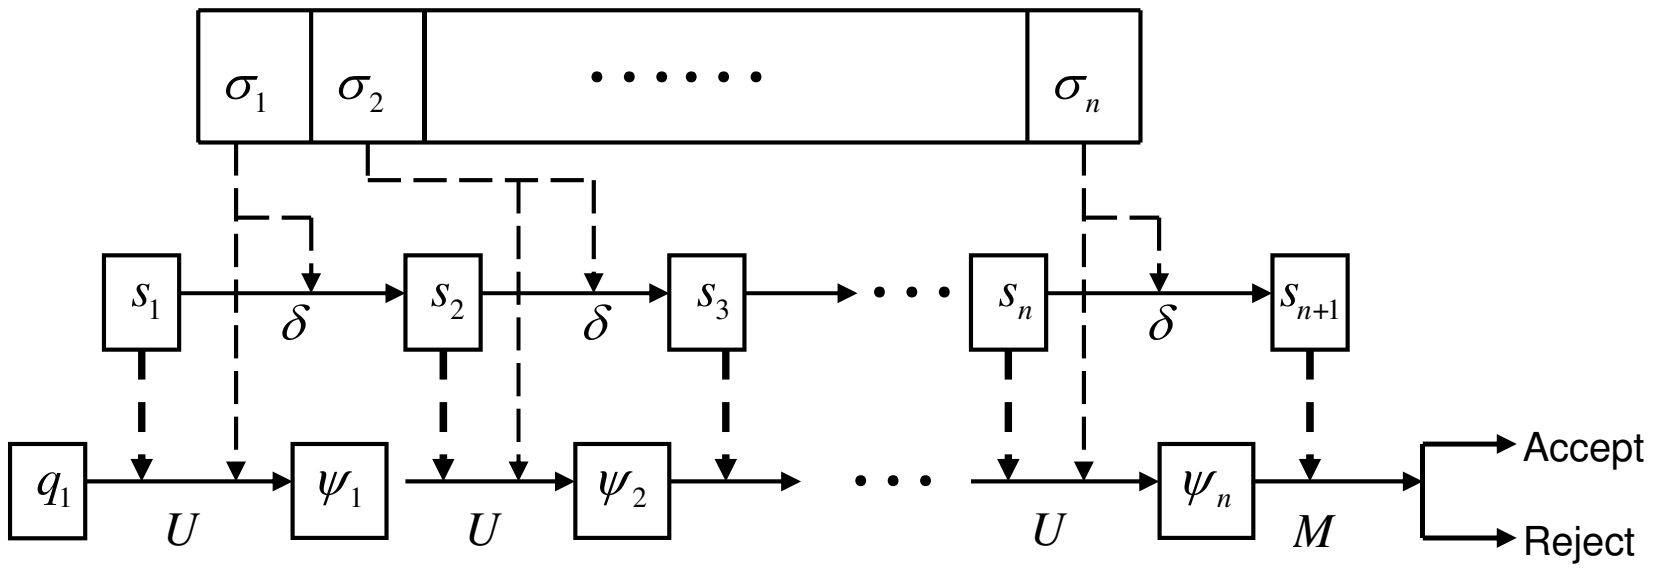

Figure 4: A 1QFAC is essentially a hybrid model consisting of two components: the quantum component and the classical component where one-way communication occurs from the classical component to the quantum one. On scanning input symbol σ_i, the machine operates as follows. (i) First, in the quantum component, a unitary operator U_{s_i,σ_i} determined by the current classical state s_i and the currently scanned symbol σ_i is applied, resulting in a new quantum state. (ii) Next, the classical component (i.e., a DFA) changes its current state s_i to a new one $s_{i+1} = \delta(s_i, \sigma_i)$. The final state s_{n+1} determines a projective measurement performed on the quantum component, resulting in acceptance or rejection. Note that there exists communication from the classical component to the quantum one, indicated by thick dashed lines, but no in the opposite direction.

By a similar idea as before, we can construct an MO-1gQFA to simulate 1QFAC $\mathcal{A}$ exactly. First, the quantum component has state space $\mathcal{H}_Q$, and at any time its evolution is characterized by a unitary operator which is controlled by the current classical state. Second, the classical component is a DFA and thus can be represented by an MO-1gQFA $M = (S, \Sigma, \{\mathcal{F}_\sigma\}_{\sigma\in\Sigma}, s_1)$ (without specifying its accepting set S_a), satisfying that $|t\rangle\langle t| = \mathcal{F}_\sigma(|s\rangle\langle s|)$ iff $t = \delta(s, \sigma)$. Then we construct an MO-1gQFA

$$\widehat{\mathcal{A}} = (\widehat{Q}, \Sigma, \{\widehat{\mathcal{E}}_\sigma\}_{\sigma\in\Sigma}, \widehat{q}_1, \widehat{P}_a)$$

where

- $\widehat{Q} = S \times Q$;
- $\widehat{q}_1 = (s_1, q_1)$;
- $\widehat{\mathcal{E}}_\sigma$ and $\widehat{P}_a$ are given below.

For each $\sigma \in \Sigma$, $\widehat{\mathcal{E}}_\sigma$ acting on $L(\mathcal{H}_S \otimes \mathcal{H}_Q)$ is given by

$$\widehat{\mathcal{E}}_\sigma = (\mathcal{F}_\sigma \otimes \mathcal{I}) \circ \mathcal{E}_\sigma$$

where $\mathcal{I}$ is the identity supper-operator on $L(\mathcal{H}_Q)$, and $\mathcal{E}_\sigma$ is given by operation elements $\{E_s = |s\rangle\langle s| \otimes U_{s,\sigma}\}_{s\in S}$. Given $\rho \otimes \varrho \in L(\mathcal{H}_S \otimes \mathcal{H}_Q)$, we have

$$\widehat{\mathcal{E}}_\sigma(\rho \otimes \varrho) = \sum_{s\in S} \langle s|\rho|s\rangle \mathcal{F}_\sigma(|s\rangle\langle s|) \otimes U_{s,\sigma} \varrho U_{s,\sigma}^\dagger,$$

which captures the idea: if the current state of the classical component is s, then $U_{s,\sigma}$ is performed on the quantum component, and furthermore s changes to another state according to $\mathcal{F}_\sigma$.

Instead of specifying the set of accepting states,[8] we specify here the final projective measurement $\{\widehat{P}_a, \widehat{P}_r\}$. Suppose that each $s \in S$ induces a projective measurement $\mathcal{M}_s = \{P_{s,a}, P_{s,r}\}$. Then we let

$$\widehat{P}_a = \sum_{s_i\in S} |s_i\rangle\langle s_i| \otimes P_{s_i,a}$$

and

$$\widehat{P}_r = \sum_{s_i\in S} |s_i\rangle\langle s_i| \otimes P_{s_i,r}.$$

It is easily verified that $\widehat{P}_a$ and $\widehat{P}_r$ form a projective measurement.

The constructed MO-1gQFA $\widehat{\mathcal{A}}$ has the same behavior as that of the given 1QFAC $\mathcal{A}$. This is illustrated in Figure 5.

The above results are summarized as follows.

---

[8] Specifying an accepting state set is essentially equivalent to specifying a projective measurement.

$$\begin{array}{l}
s \xrightarrow{\delta} t = \delta(s,\sigma) \\
|\psi\rangle \xrightarrow{U_{s,\sigma}} |\psi'\rangle = U_{s,\sigma}|\psi\rangle \\
\hline
|s\rangle|\psi\rangle \xrightarrow{\mathcal{E}_\sigma} |s\rangle\langle s| \otimes U_{s,\sigma}|\psi\rangle\langle\psi|U^\dagger_{s,\sigma} \\
\qquad\quad \xrightarrow{\mathcal{F}_\sigma \otimes \mathcal{I}} \rho = \mathcal{F}_\sigma\left(|s\rangle\langle s|\right) \otimes U_{s,\sigma}|\psi\rangle\langle\psi|U^\dagger_{s,\sigma} \\
\qquad\qquad\qquad\quad = |t\rangle\langle t| \otimes U_{s,\sigma}|\psi\rangle\langle\psi|U^\dagger_{s,\sigma} \\
Tr(\widehat{P}_a\rho) = \|P_{t,a}U_{s,\sigma}|\psi\rangle\|^2
\end{array}$$

Figure 5: Simulating an evolution step in 1QFAC by one in MO-1gQFA. The part above the line stands for a step in 1QFAC and the one under the line stands for a step in MO-1gQFA. It can be seen that they have the same behavior at each step. Suppose that a measurement is performed at the end. Then they have the same probabilistic distribution over the set $\{a, r\}$.

Theorem 4. *Given a 1QFAC with Q and S as its quantum and classical state sets, respectively, there exists an MO-1gQFA simulating it exactly, with $S \times Q$ as its state set.*

Remark 6. In [24] it was proven that the languages recognized by 1QFAC are regular languages. This result can now be seen as a corollary of Theorem 4 and item (i) in Theorem 1. Also, it is readily seen that for each regular language $\mathcal{L}$, there exists a 1QFAC recognizing it. For that, the classical component in Figure 4 can be designed to be a DFA accepting $\mathcal{L}$, and the quantum component can be assumed to be a qubit having two states $|0\rangle$ and $|1\rangle$, with $|1\rangle$ as the initial state. Each operator U is simply set to be I. If s is an accepting state, then let $P_{s,a} = |1\rangle\langle 1|$ and $P_{s,r} = |0\rangle\langle 0|$; otherwise, let $P_{s,a} = |0\rangle\langle 0|$ and $P_{s,r} = |1\rangle\langle 1|$.

Note that the authors of [24] proposed a question: If 1QFAC are allowed to be measured many times, i.e, measurements are performed after reading each symbol like MM-1gQFA, then how about the language recognition power of 1QFAC? From the results in this paper, it follows that measurement times have no impact on the language recognition power of 1QFAC, since for each measured-many version of 1QFAC, there exists an MM-1gQFA simulating it exactly, and thus exists an MO-1gQFA simulating it exactly.

4.6. Discussions on hybrid models with two-way tape heads

In the previous subsections, we characterized the structure of three hybrid models: CL-1QFA, 1QCFA and 1QFAC, and showed that they can be simulated exactly by MO-1gQFA. We unify the three hybrid models in Figure 6.

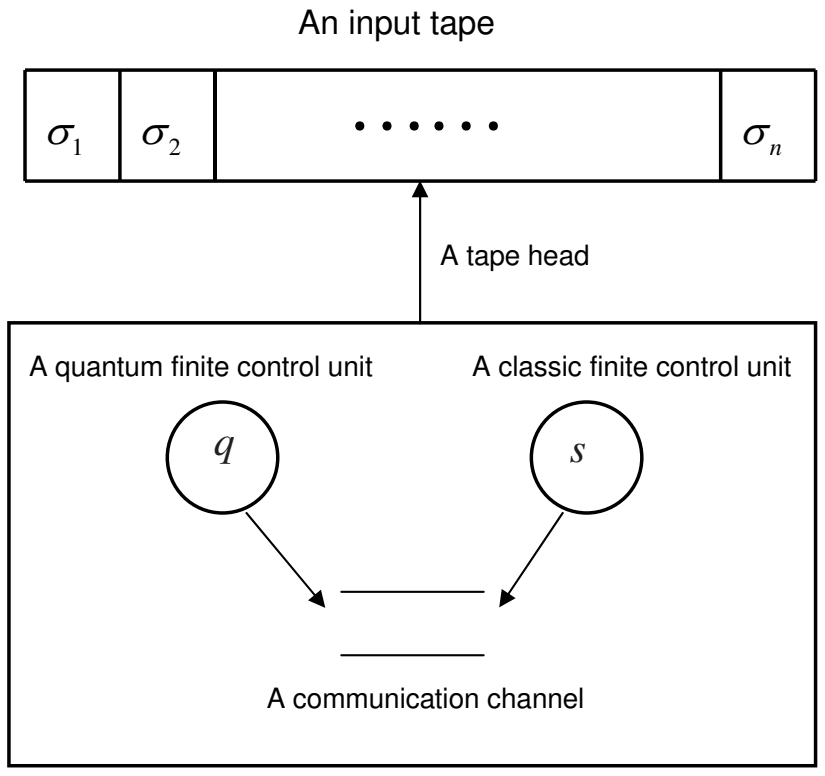

Figure 6: A diagram illustrating the idea behind the three hybrid models: CL-1QFA, 1QCFA and 1QFAC. On scanning an input symbol, communication will occur between the two units. In CL-1QFA, the quantum unit writes its measurement result into the communication cell and then the classical unit reads it. In 1QCFA, there are two runs of communication: (1) the classical unit writes its current state into the communication cell and then the quantum unit reads it; (2) the quantum unit writes its performance result into the communication cell and then the classical unit reads it. In 1QFAC, the classical unit writes its current state into the communication cell and then the quantum unit reads it.

Next, we consider the two-way variants of these hybrid models introduced before, i.e., in Figure 6, the tape head is allowed to move in two ways and the movement is regulated by the classical unit. We hope some further study will be devoted to such models. First we have a look at the two-way variant of 1QCFA, that is, 2QCFA which have been disscused by [4]. A 2QCFA is almost the same as a 1QCFA, except that the tape head of 2QCFA that is regulated by the classical unit is allowed to move towards left or right and even to stay stationary. In other words, the classical component of a 2QCFA is a two-way DFA (2DFA).[9] Furthermore, it can be assumed to be a *unidirectional* 2DFA,[10] and thus its transition function can be described by two mappings $\delta : S \times \Sigma \to S$ and $D : S \to \{-1, 0, 1\}$ that maps a state to a direction. Therefore, Figure 2, accompanied with a mapping D, is sufficient to illustrate the structure of 2QCFA. A little difference is that in a 2QCFA, the set of classical states S is usually divided into three subsets: S_{acc}, S_{rej} and $S \setminus (S_{acc} \cup S_{rej})$, and at each step, if the current classical state is in S_{acc} (or S_{rej}), then the machine halts with acceptance (or rejection); otherwise, continues to do the next step. It is worth mentioning that the quantum Turing machine model studied by Watrous [25] is also a hybrid model that has a similar structure as 2QCFA. Or in other words, 2QCFA can be regarded as a degenerated version of the model in [25] by deleting the work tape.

---

[9] More specifically, the 2DFA can be thought to have two heads: one is the tape head which can move in two ways to scan the tape symbol, and the other one is to access the communication cell.

[10] A unidirectional 2DFA means that each state can be entered only in a unique direction. Any 2DFA can be simulated by a unidirectional 2DFA by increasing some states.

We can also consider the two-way variants of CL-1QFA and 1QFAC. For instance, if the classical component in Figure 1 is represented by a 2DFA and the classical states are divided into halt states and non-halt states, then we get a CL-2QFA. In Figure 4, if the classical component is a 2DFA and a measurement determined by the current classical state is performed at each step, then we get a 2QFAC. Then, how about the language recognition power of CL-2QFA and 2QFAC? Specially, CL-2QFA can be regarded as special cases of 2QCFA, which is similar to relationship between CL-1QFA and 1QCFA as mentioned in Remark 5. It has been shown that CL-1QFA and 1QCFA have the same language recognition power. Then, an question is: are CL-2QFA as powerful as 2QCFA?

In addition, one can also define two-way variants of MO-1gQFA. Such models can be defined to be unidirectional, that is, the moving direction of the tape head is determined by the state, as done in [11]. It is not difficult to see that CL-2QFA, 2QCFA and 2QFAC can be simulated exactly by such two-way models as in the one-way case. However, there seems to be no clue on the problem whether they have the same computational power.

5. Conclusions

In the literature, there are three hybrid models of QFA: CL-1QFA, 2QCFA, and 1QFAC which are distinguished from other QFA models by consisting of two interactive components: a quantum one and a classical one. These models are of particular interest and worthy of further consideration in that they are more realistic than fully quantum models, and often save states efficiently compared with classical models. Our contributions in this paper are summarized as follows. (i) First, we have characterized the structure of these models in a uniform framework: each hybrid model can be seen as a communication system, and the communication between two components can be modeled by controlled operations. Our results have provided an intuitive insight into the structure of these models. (ii) Second, we have clarified the relationship between these hybrid models and other models. Specifically, we have shown that CL-1QFA, 1QCFA, and 1QFAC can all be simulated exactly by MO-1gQFA. Some results in the literature concerning the language recognition power and the equivalence problem of these hybrid models follow directly from our results. Note that MO-1gQFA and another early proposed model called ancilla QFA represent the same model, but in different forms. Ancilla QFA can also be regarded as quantum sequential machines assigned with some accepting states. The relationship between these models are illustrated in Figure 7. These results obtained for one-way hybrid models can also be extended to their two-way versions.

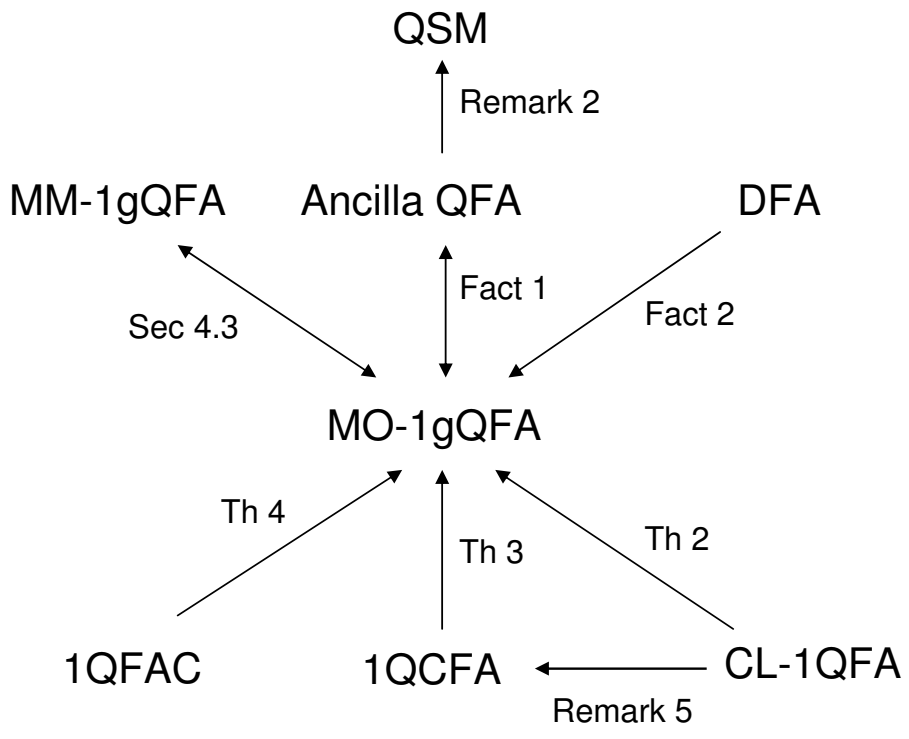

Figure 7: A diagram illustrating the relationship between the models mentioned in this paper. A one-directional arrow denote that the model at the tail can be simulated by the one at the head; for instance, 1QCFA can simulated by MO-1gQFA. A bidirectional arrows mean that the two models associated by it can simulate each other. The label on the arrow denotes where the result associated with the arrow can be found. For example, the result that 1QFAC can be simulated by MO-1gQFA can be found in Theorem 4. Note that all the models in the diagram except QSM have the some language recognition power, and recognize only the class of regular languages.

Acknowledgements

Li thanks Dr. A. Yakaryilmaz for his reply to a query in [26], and Dr. M. Hirvensalo for he kindly sending us the electronic copy of reference [10].

References

[1] A. Ambainis and R. Freivalds, *One-way quantum finite automata: strengths, weaknesses and generalizations*, in Proceedings of the 39th Annual Symposium on Foundations of Computer Science, IEEE Computer Society Press, 1998, pp. 332-341.

[2] M. Amano and K. Iwama, *Undecidability on Quantum Finite Automata*, in Proceedings of the 31st Annual ACM Symposium on Theory of Computing, 1999, pp. 368-375.

[3] A. Ambainis, A. Nayak, A. Ta-Shma, and U. Vazirani, *Dense quantum coding and quantum automata*, J. ACM, 49 (2002), pp. 496-511.

[4] A. Ambainis and J. Watrous, *Two-way finite automata with quantum and classical states*, Theoret. Comput. Sci., 287 (2002), pp. 299-311.

[5] A. Bertoni and M. Carpentieri, *Regular Languages Accepted by Quantum Automata*, Inform. and Comput., 165 (2001), pp. 174-182.

[6] A. Bertoni, C. Mereghetti, and B. Palano, *Quantum Computing: 1-Way Quantum Automata*, in Proceedings of the 9th International Conference on Developments in Language Theory, Lecture Notes in Comput. Sci. 2710, Springer-Verlag, Berlin, 2003, pp. 1-20.

[7] A. Brodsky and N. Pippenger, *Characterizations of 1-way quantum finite automata*, SIAM J. Comput., 31 (2002), pp. 1456-1478.

[8] C. Dwork, and L. Stockmeyer, Finite state verifier I: the power of interaction, *Journal of the ACM*, 39 (1992) (4): 800-828.

[9] M. Hirvensalo, Various Aspects of Finite Quantum Automata, in 12th International Conference on Developments in Language Theory (DLT 2008), Lecture Notes in Computer Science, vol. 5257: 21-33, 2008.

[10] M. Hirvensalo, *Quantum Automata with Open Time Evolution*, International Journal of Natural Computing Research, 1(2010), pp. 70-85.

[11] A. Kondacs and J. Watrous, *On the power of finite state automata*, in Proceedings of the 38th IEEE Annual Symposium on Foundations of Computer Science, 1997, IEEE Computer Society, pp. 66-75.

[12] J. Kaneps and R. Freivalds, *Running time to recognize nonregular languages by 2-way probabilistic automata*, in Proceedings of the 18th International Colloquium on Automata, Languages and Programming, Lecture Notes in Comput. Sci. 510, Springer, 1991, pp. 174-185.

[13] L. Z. Li and D. W. Qiu et al, *Characterizations of one-way general quantum finite automata*, Theoret. Comput. Sci., 419 (2012), pp. 73-91.

[14] L. Z. Li and D. W. Qiu, *Determination of equivalence between quantum sequential machines*, Theoret. Comput. Sci., 358 (2006), pp. 65-74.

[15] L. Z. Li and D. W. Qiu, *Determining the equivalence for one-way quantum finite automata*, Theoret. Comput. Sci., 403 (2008), pp. 42-51.

[16] L. Z. Li and D. W. Qiu, *A note on quantum sequential machines*, Theoret. Comput. Sci., 410 (2009), pp. 2529-2535.

[17] C. Moore and J. P. Crutchfield, *Quantum automata and quantum grammars*, Theoret. Comput. Sci., 237 (2000), pp. 275-306.

[18] C. Mereghetti and B. Palano, *Quantum finite automata with control language*, Theoretical Informatics and Applications, 40 (2006), pp. 315-332.

[19] M. A. Nielsen and I. L. Chuang, *Quantum Computation and Quantum Information*, Cambridge University Press, Cambridge, 2000.

[20] H. Nishimura, and T. Yamakami, An application of quantum finite automata to interactive proof systems, *Journal of Computer and System Sciences*, 75 (2009), pp. 255-269,

[21] K. Paschen, *Quantum finite automata using ancilla qubits*, Technical report, University of Karlsruhe, 2000.

[22] D. W. Qiu, *Characterization of Sequential Quantum Machines*, Internat. J. Theoret., Phys. 41 (2002), pp. 811-822.

[23] D. W. Qiu, L. Z. Li, X. F. Zou, P. Mateus, and J. Gruska , *Decidability of the Equivalence of Multi-Letter Quantum Finite Automata*, Acta Informatica, 48 (2011), pp. 271-290.

[24] D. W. Qiu, P. Mateus, and A. Sernadas, *One-way quantum finite automata together with classical states: Equivalence and Minimization*, arXiv:0909.1428.

[25] J. Watrous, On the complexity of simulating space-bounded quantum computations, Computational Complexity 12 (2003), pp. 48-84.

[26] A. Yakaryilmaz, A.C. Cem Say, Unbounded-error quantum computation with small space bounds, Inform. and Comput., 209 (2011), pp. 873-892.

[27] M. S. Ying, N. K. Yu, Y. Feng, and R. Y. Duan, Verification of Quantum Programs, arXiv:1106.4063.